

YOU'RE INVITED TO THE OPENING OF GRIFFEY'S HI-FIDELITY SHOW

• FRIDAY
• SATURDAY

Most Famous 20-WATT AMPLIFIER
Exceptional performance from 15 to 20,000 C.P.S.




95.5% Distortion Free At Rated Output
Special **\$2988**

Latest Model **GENERAL ELECTRIC**
Variable Reluctance **CARTRIDGE**
With Clip-In Needles
Complete With 2 Sapphire Needles
Regular **\$13.95**
SORRY NO DEALERS Special ... **\$788**



HI-FI CROSSOVER NETWORK
For Use With 8 Ohm Woofer and Tweeters




Sorry No Dealers Regular **\$16.95**
Special **\$888**

DUO-TONE REGISTERED
DIAMOND NEEDLE
For G.E. Reluctance Cartridge **988**
Regular 27.50
Not a chip, but a genuine diamond, guaranteed for years of satisfactory service. Limited quantity.

FAMOUS MAKE AM-FM TUNER AMPLIFIER COMBINATION
10 Watt Hi-Fi With Push Pull Output. 20 to 17,000 c.p.s. **59⁹⁵**
Regular 132.50
Limited Quantity! Hurry!

Jensen
Authentic HIGH FIDELITY LOUDSPEAKERS

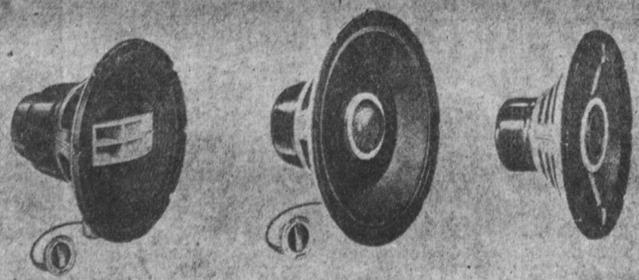

H-222 2-way coaxial
The most popular true coaxial loudspeaker today with added improvements to thrill you! Especially designed to achieve advanced performance where size is limited by enclosure restrictions . . . or your budget. Compression driver tweeter and six-cell 1/2" horn. Full two-channel dividing network. Power rating, 25 watts. Impedance, 16 ohms. Baffle opening, 10 1/2" OD, 12 1/2" depth, 8 1/4" dia. Has H-F Balance Control on 36" cord. Shipping Weight, 13 lbs.
Net Price **\$58.50**

K-310A 2-way coaxial
A fine low-cost true two-way 16" high fidelity speaker that will outperform many speakers priced at substantially higher prices. Perfectly matched direct radiator 1/2" unit covers the upper portion of the frequency range; h-f balance control provides proper balance of high frequencies. Integral frequency division system. Power rating, 16 watts. Impedance, 16 ohms. Baffle opening, 13 1/2" OD, 13 1/2" depth, 8 1/4" shipping Weight, 12 lbs.
Net Price **\$39.75**

K-210 2-way coaxial
Provides the excellent high fidelity reproduction of a coaxial two-way system in a unit of small size and amazingly low cost. Matched direct radiator 1/2" unit; provision for easily adding ST-461 H-F Balance Control. Compactness and low cost makes it ideal for modernizing TV and radio sets equipped with 12" inch single-unit speakers. Built-in frequency-dividing system. Power rating, 12 watts. Impedance, 8 ohms. Baffle opening, 10 1/2" OD, 12 1/2" depth, 6 8-16" shipping Weight, 7 lbs.
Net Price **\$27.50**

RCA VICTOR

HI-FIDELITY "VICTROLA"

MARK III

... Plays all speeds ... Has AM-FM Radio — Luxurious cabinet.

Here's a complete HI-FI system, ready to plug in and play. You get 3 speakers, panoramic sound . . . automatic record changer that plays all 4 speeds, AM-FM Radio brings you extra listening pleasure.

Truly the Best buy in High Fidelity Package Unit




MODEL 7HF3—NEW ORTHOPHONIC HIGH FIDELITY "VICTROLA"—Available in Mahogany, Maple or Light Oak.

COME IN TODAY FOR A THRILLING DEMONSTRATION OF RCA VICTOR "ORTHOPHONIC HI-FIDELITY"



harman kardon TUNER-AMPLIFIER

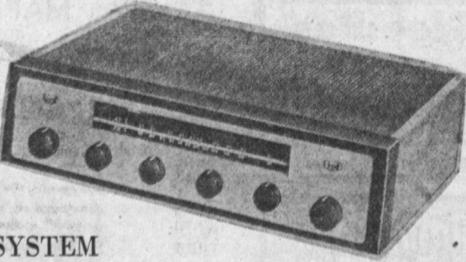


"RECITAL II"
Brilliant HI-FIDELITY SYSTEM

- Speaker Impedance Selector Switch
- Phone Pickup Selector Switch
- 6-Position Dynamic Loudness Selector
- Tape and Rumble Filter

PLUS ALL THE MOST WANTED FEATURES IN HI-FIDELITY
A COMPLETE HI-FIDELITY SYSTEM ALL IN ONE UNIT—SEE IT TODAY

POWER OUTPUT
20 Watts with a peak of 30 watts

Frequency Response
20 to 20,000 C.P.S.

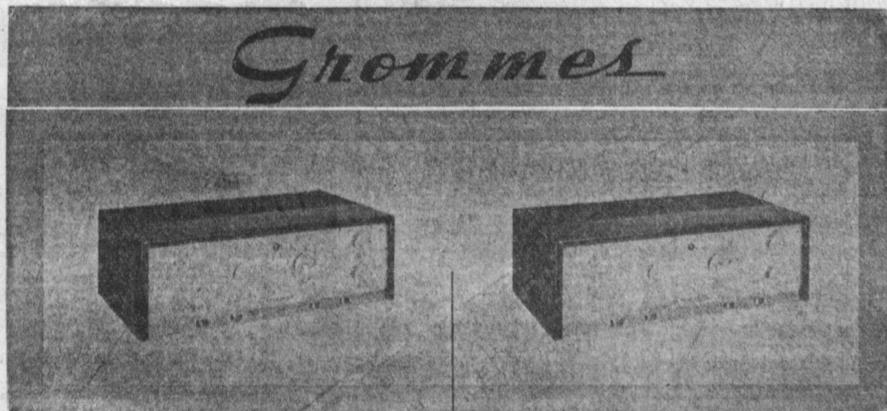

15 PG

20 PG

Controls—1. Input selector for Aux; Tuner; Tape; phono. 2. Turnover for Tape head; RIAA 500; LP 500; 300. 3. Roll off for Tape head; 6; RIAA 13.7; LP 16. 4. Loudness. 5. Bass —20 DB. to +20 DB. 6. Treble —13 DB. to +13 DB. Slide switches—1. Rumble filter. 2. Scratch filter. 3. Loudness off-on. 4. Power off-on. Outputs—4, 8, and 16 ohms plus tape recorder. Sensitivity—Aux.; Tuner; Tape channels—4, volts and mag. phono channel—008 volts for 12 watt output. Hum and noise—75 DB. below rated output (tuner input). Tubes—3—12AX7, 2—6V6GT and 5Y3GT. Charcoal and brass: 12 3/4" W x 4" H x 9" D; Shpg. wt. 15 lbs.; 2—AC outlets; fused; for 110-120 volts AC.

SPECIFICATIONS

Power output—12 watts with 20 watts peak. Frequency response—plus or minus 0.5 DB. 20 to 30,000 CPS. at 1 watt. Power response—plus or minus 1. DB. 30 to 15,000 CPS. at 12 watts. Distortion—1% harmonic and 2% intermodulation at 12 watts. Feedback—Better than 70 DB. throughout; 15 DB. around output transformer.

SPECIFICATIONS

Power output—20 watts with 30 watts peak. Frequency response—plus or minus 0.5 DB. 15 to 30,000 CPS. at 1 watt. Power response—plus or minus 1. DB. 27 to 20,000 at 20 watts. Distortion—1% harmonic and 2% intermodulation at 20 watts.

OPENING SPECIAL

69⁵⁰

OPENING SPECIAL

89⁵⁰

WE FEATURE THESE FOLLOWING NAME BRANDS . . .

- JENSEN
- GROMMES
- HARMON KARDON
- ACOUSTI-CRAFT
- VIKING-TAPES
- ELECTRO-VOICE
- WEBCOR
- GARRARD
- PICKERING
- RADIO CRAFTSMAN

And many others too numerous to mention.

Factory representatives will be present to answer all questions pertaining to Hi-Fidelity—Come in or feel free to call for expert advice.

FR. 6-3444
ELECTRIC GRIFFEY
212 So. Pacific Ave., Redondo Beach

TELEFUNKEN
Automatic 3-SPEED RECORD CHANGER



Interchanges Records
Has Pull-Out Cartridge
REGULAR \$69.95
29⁹⁵
4 POLE 4 COIL MOTOR
FLOATING CHASSIS
Base \$4.95